## ComNav






# Autopilot 2001

### **Engineered for Performance, Reliability and Value**

- Fixed station autopilot, either flush or bracket mounted
- Reliable in any sea and weather conditions
- Suitable for larger vessels, in the range of 80 to 500+ feet
- Three "Turn" functions, Continuous, Emergency and "U" Turns
- Power steering feature for ease of maneuvering
- Port and Starboard dodge buttons for collision avoidance
- Compatible with most types of steering sysems
- "Hands Off" automatic trim
- Variable yaw and turn rates
- Optional full function Remotes, both fixed and hand held
- Two RemotePorts built in
- Easy course changes, from one degree to major changes
- Two Navigation ports for dual Nav input of NMEA 0183
- Heading output provides N+1, NMEA 0183 or AD 10S heading information
- Output for optional analog Rudder Angle Indicator, up to 4 stations
- Backlit LCD display with an adjustable automatic dimmer for night viewing
- Visual and audible alarms
- Easy to install and fully compatible with your onboard instruments
- Ten selectable steering parameters
- Optional Gyro interface for stepper, syncro or NMEA gyro systems
- Optional Sail version with wind input and automatic Tack function
- Extended 3 year warranty

#### **DIMENSIONS**

Control Unit:  $210mm \times 95mm \times 83mm / 8.25 \times 3.75 \times 3.25$  inches Distribution Box:  $114mm \times 133mm \times 25mm / 4.6 \times 5.25 \times 1.0$  inches Fluxgate Compass: 122mm Diam.  $\times$  102mm High / 4.8 Diam  $\times$  4 inches High

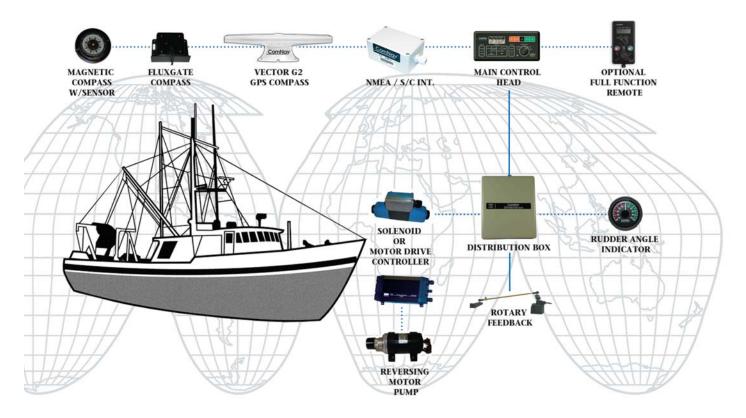

#### **SPECIFICATIONS**

Operating Voltage: 12 or 32V DC

Power Consumption: Average 0.5 amps, 3 amps Peak

Solenoid Output: 3 amps max. Clutch Output: 3 amps max. Navigational Interface: NMEA 0183

Heading Output: N+1, NMEA 0183 and AD 10S

Heading Reference: Fluxgate or Magnetic Compass / NMEA Compass

**Course Resolution:** 1° **Course Detection:** 0.25°

#### **OPTIONS**

- Gyro version
- A wide range of fixed or portable full function Remotes.
- Non Follow-up Jog Switches.
- Remote Expander used to support up to 4 Remotes.
- Rudder Angle Indicator, easy-to-read analog display.
- Rate Stabilized Fluxgate Compass.

### ComNav



#### ComNav Marine Ltd.

#15-13511 Crestwood Place,
Richmond, British Columbia • Canada • V6V 2G1

Phone: 604-207-1600 • Fax: 604-207-8008

E-mail: sales@comnav.com

www.comnav.com

Worldwide Service

Printed in Canada

Represented by:

Specifications subject to change without notice